


PEGASUS SYSTEM

Weighing system for front loaders

Features and advantages :

- Easy to install.
- Possibility to connect a printer.
- Automatic calculation of the total till to max 256 weighing and 99 tons.
- Possibility to set an overload value.
- Alarm in case of overload.
- Easy and immediate calibration set.
- Fine calibration to obtain the best from your system.
- Red led display for an high efficiency in every environmental and working condition.
- Availability of extension cables to reach any installation point on every type of vehicle.

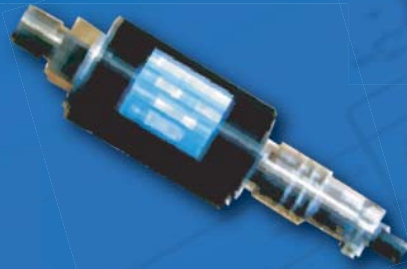

Small size... Small price...



Buy your:

CUSTOMER CARE CARD

PHONE
SUPPORT

REMOTE ACCESS



dinamica generale®

Tel +39 0386 52134
Fax +39 0386 51523
www.dinamicagenerale.com



dinamica generale®

Environmental and system specifications

- Working temperature : -20°C / +60°C
- Computer protection grade : IP66
- Range: 0-99999 Kg
- Accumulative weighing numbers : 256
- Overload weight : 0-99999 Kg

Technical features



PRESSURE TRANSDUCER

| | |
|----------------|---------|
| Capacity : | 250 bar |
| Raccordo : | 1/4 Gas |
| Cable lenght : | 5 m |

the weight of the material is proportional at the pressure in the hydraulic circuit of your vehicle, so install the transducer in the sender of the hydraulic circuit to read the pressure.



PROXIMITY SENSOR

to obtain always the correct weight reading it is necessary to weigh always in the same position, the proximity sensor signals when you are in the correct position and start the weighing.



STAD 02

Display with a perfect visibility in every environmental condition

| | |
|-------------------------------|---------------|
| Dimensions : | 200x120x70 mm |
| Display Stad 02 : | 5 digit 25 mm |
| Computer resolution reading : | 5 - 10 - 20 |
| System power : | 9.5 - 32 Vdc |
| Case material : | Polycarbonate |

Pegasus system

- N° 1 pressure trasducer 250 bar with 5 m cable
- N° 1 microcomputer STAD 02 Dlr with printer predisposition
- N° 1 proximity sensor with 2 m cable
- N° 1 connection cable to proximity sensor (L=5 m)
- N° 1 power cable (L=3,5 m)

Code 999-0090

OPTIONAL

N° 1 Thermal printer

Code 999-0010

Thermal printer:

You can connect it at any moment and thanks to its 2,8 m cable and you can put it in any position of your cabin.



Dinamica Generale srl - Via Mondadori, 15 - 46025 Poggio Rusco (MN) Italy
Tel ++39 0386.52134 - Fax ++39 0386.51523
www.dinamicagenerale.com - info@dinamicagenerale.com

